



LINK ON ANTENNA TERMINAL BOARD. CUT WHEN EXTERNAL AM ANTENNA IS USED.

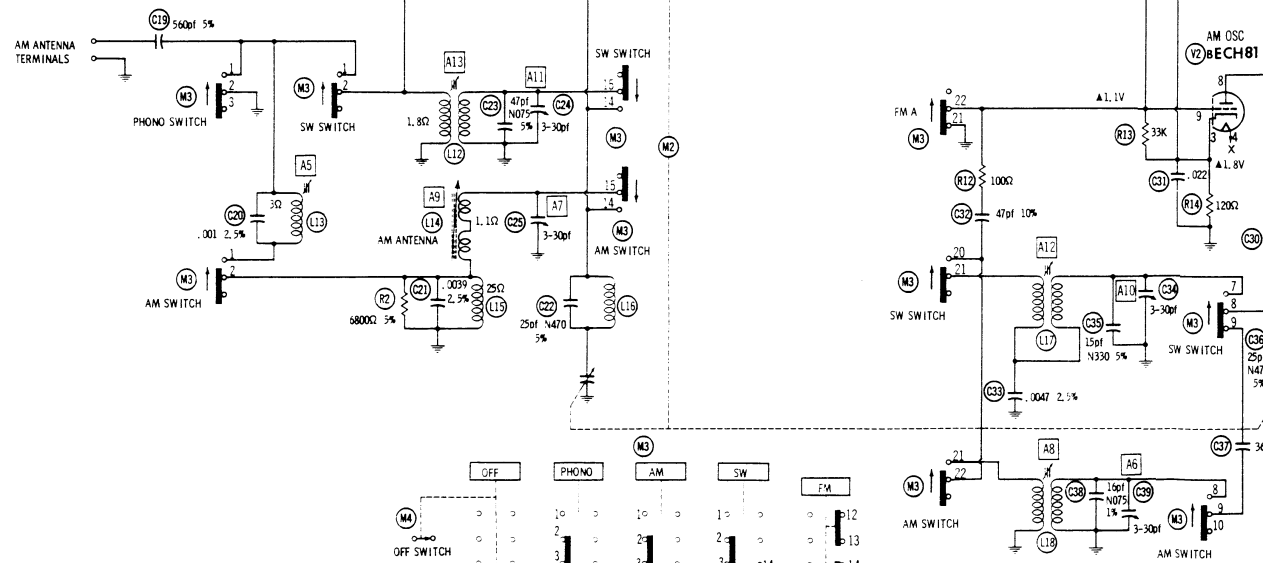

Resistors are 1/2 watt or less and rated 10% or 20% unless otherwise indicated.

1. Voltage measurements taken with vacuum tube voltmeter.
2. All controls set for normal operation, no signal applied.
3. Measured values are from socket pin or terminal to common ground.
4. All terminals viewed from bottom unless otherwise designated.
5. Numbers assigned to terminals may not be found on the unit.
6. Supply voltage maintained at rated value for voltage readings.

A PHOTOFACT STANDARD NOTATION SCHEMATIC  
© Howard W. Sams & Co. Inc., 1965

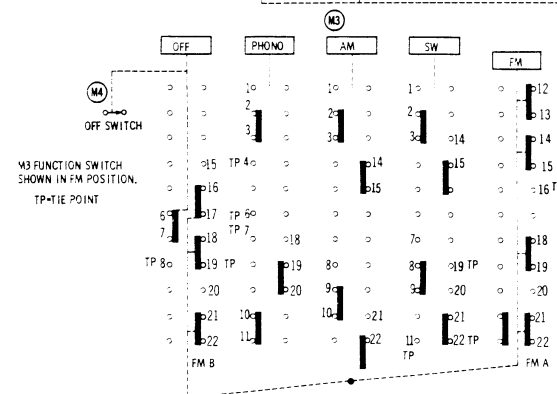

**RESISTANCE MEASUREMENT**

ITEM	TUBE	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6
V1	ECC85	2300Ω †	330K	150Ω	FIL	FIL	17.3K †
V2	ECH81	40K †	3.6meg †	120Ω	FIL	FIL	3700Ω †
V3	EF89	0Ω	390K	0Ω	FIL	FIL	NC
V4	EABC80	1N	30K	1N	FIL	FIL	500K †
V5	EM87	2.7meg	NC	0Ω	FIL	FIL	1300Ω †
V6	EL84	NC	867K	170Ω	FIL	FIL	NC

† MEASUREMENTS MADE IN "FM" POSITION UNLESS OTHERWISE DESIGNATED  
▲ MEASURED IN "AM" POSITION.