

## Removal and Installation of Garnish Molding at Ledge of Front or Rear Door

### Removal:

1. Push aside the weatherstrip at the front door just above the door lock, so that the fixing screw at the end of the garnish molding becomes accessible. Unscrew the fixing screw (Fig. 72—19/1).

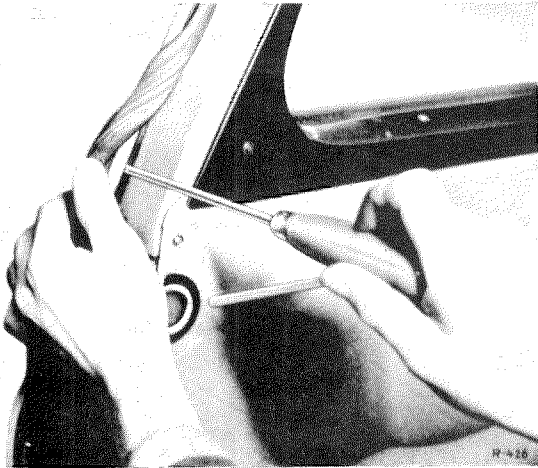


Fig. 72—19/1

2. Unscrew the fixing screw at the other end of the garnish molding (hinge side) in the same way.
3. Grip the garnish molding at one end and carefully lever it out of the clips by means of

a folding rule or a hardwood wedge (Fig. 72—19/2).

Do not use a sharp-edged tool.

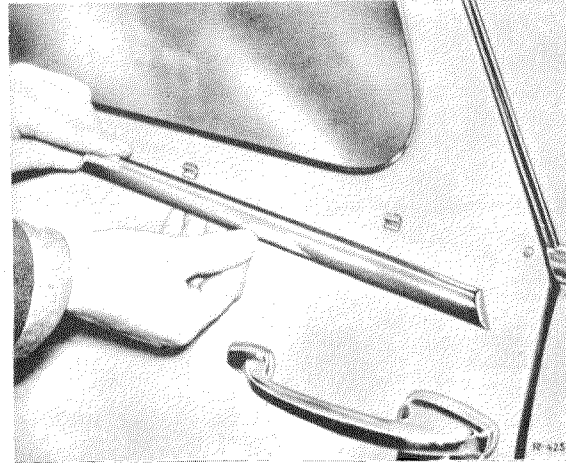


Fig. 72—19/2

Shown at the rear door

### Installation:

4. Installation is the reverse of the removal procedure; replace damaged clips.

**Note:** Since usually the light metal garnish molding becomes bent during removal, it is advisable to install a new garnish molding.

## Removal and Installation of Lower Front or Rear Door Garnish Molding

### Removal:

1. Grip the garnish molding at one end and carefully lever it out of the clip by means of a folding rule or a hardwood wedge. Do not use a sharp-edged tool.

### Installation:

2. Installation is the reverse of the removal procedure; replace damaged clips (Fig. 72—20/1).

**Note:** Since usually the light metal garnish molding becomes bent during removal, it is advisable to install a new garnish molding.

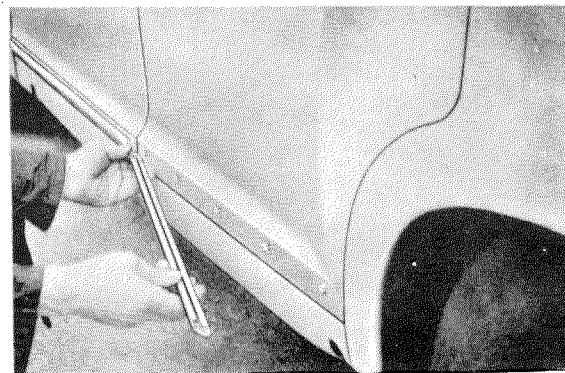


Fig. 72—20/1