

Removal and Installation of the Weatherstrip for the Left or Right Rear Door

Job No.

73—15

Removal:

1. Remove the 7 retaining clips (1) at the hinge side (Fig. 73—15/1).

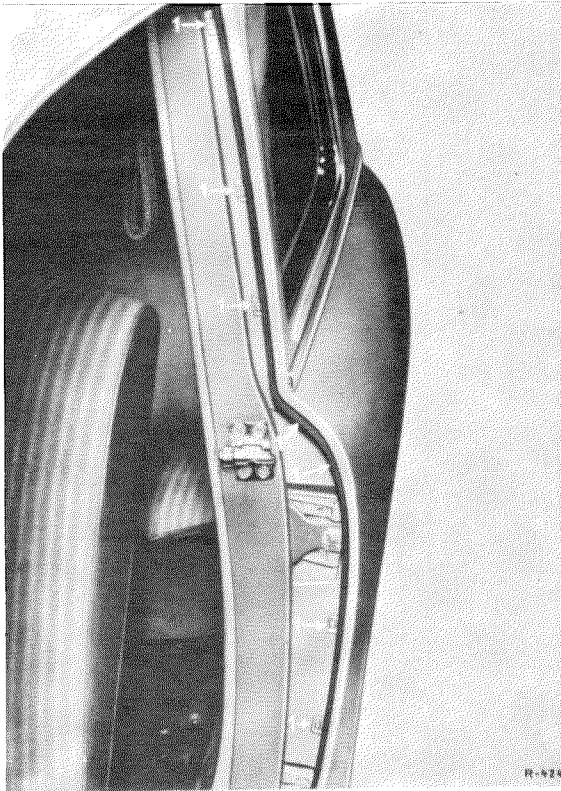


Fig. 73—15/1

1 Retaining clips

2. Remove the cemented weatherstrip. Carefully scrape off all rubber and adhesive residue.

Installation:

3. Coat the groove in the rear door with Tera-kol Rubber Adhesive II. Press the weatherstrip into the groove while it is still wet.

Carefully remove any adhesive that may ooze out.

Note: The weatherstrip is applied by means of a so-called two-component adhesive. The weatherstrip supplied as a replacement part has been treated with Terakol Rubber Adhesive I at the cementing surface.

The vulcanizing effect which produces a firm bond between rubber and sheet-metal is brought about when the two components come into contact.

4. Install the 7 retaining clips (1) at the hinge side. Use new retaining clips.
5. Remove rubber abrasion particles from the door groove by means of gasoline.