

Removal and Installation of Front Cover Panel

Removal:

1. Remove the front bumper (see Job No. 88—5).
2. Open the engine hood and unscrew the lower part of the hood lock.
3. Unscrew the screws (2) between the front cover panel and the two strip springs for mounting the radiator (see Fig. 88—4/1) and Fig. 88—4/2).

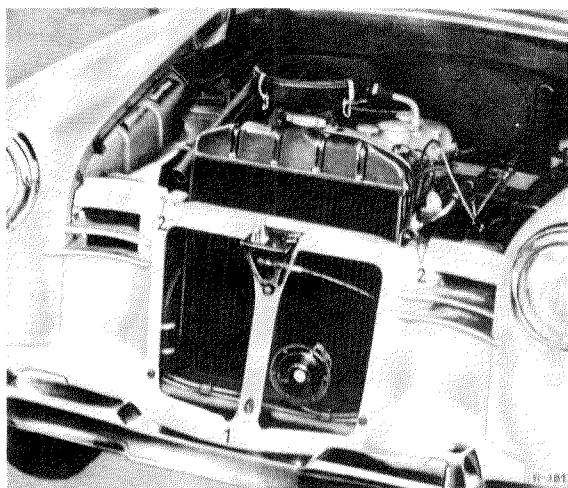


Fig. 88—4/1

- 1 Screw for chassis base panel
2 Screw for strip spring

4. Unscrew the two lower ornamental moldings for the air inlet at the left and the right.
5. Unscrew the screws (1) between the fender and the cover panel (see Fig. 88—1/2).

Then remove the screw (1) between the chassis base panel and the cover panel and remove the cover panel (Fig. 88—4/1).

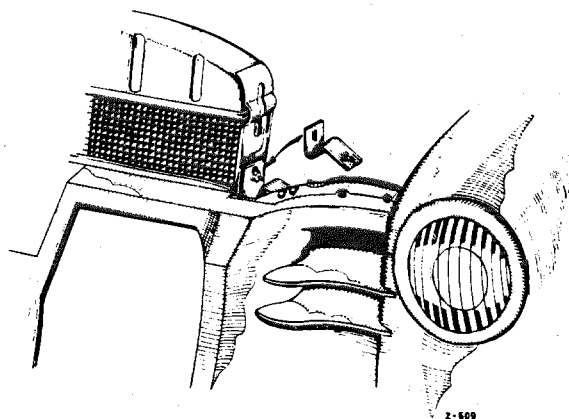


Fig. 88—4/2

Installation:

6. Insert the cover panel between the two front fenders, taking care not to damage the car finish. If necessary, bend the front fenders slightly outward.
7. Fit the weatherstrip and provisionally screw on the cover panel. Screw on the lower part of the hood lock and close the hood. Align the cover panel together with the weatherstrip.
8. Tighten all screws.
9. Install the other parts by reversing the removal procedure.