

3. Unscrew the upper and lower button-head screw fixing the end bar to the center bar, and remove the end bar.
4. If necessary, straighten the bracket.

Installation:

5. Cement the rubber sections (8) or (29) to the bumper guards.
Otherwise installation is the reverse of the removal procedure.

C. Removal and Installation of Left or Right Rear Reflector

The rear reflectors (1) are fitted into the guards (23) and (24) of the rear bumper and are held in position by a spring (2) (see Fig. 88 — 5/3 and Fig. 88 — 5/4).

Removal:

1. Use a screw driver to press the spring (2) to the rear from below and at the same time to push it upward (Fig. 88 — 5/4). Then take out the rear reflector and spring.

Installation:

2. Install the rear reflector together with the spring and slide it into the slot of the bumper guard, pressing it to the rear at the same time.

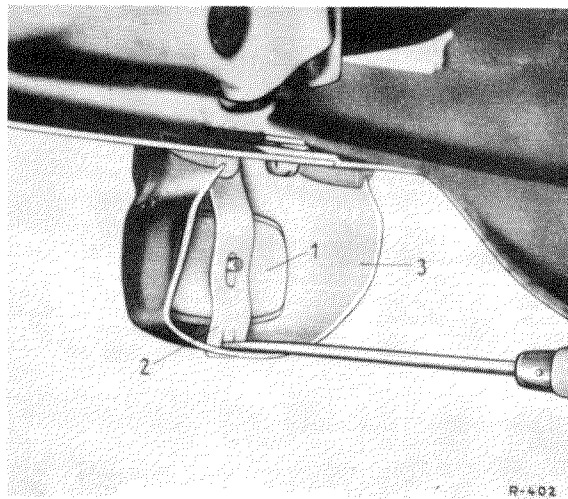


Fig. 88 — 5/4

- 1 Rear reflector
- 2 Spring
- 3 Bumper guard