

Removal and Installation of the Door Trim Panel on the Left or Right Front or Rear Door

Removal:

1. Remove the window reveal molding (see Job No. 72—3).
2. Remove the window regulator handle (see Job No. 72—4).
3. Remove the arm rest (see Job No. 72—6).
4. Pry off the escutcheon at the inside door handle (Fig. 72—7/1).

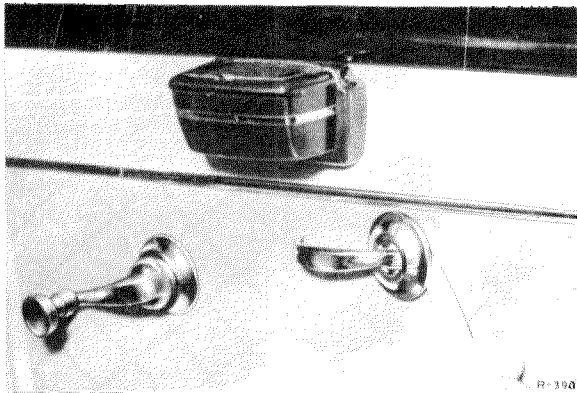


Fig. 72—7/1

5. Unscrew the fixing screw for the door trim panel at the top on the lock side.
6. Carefully slide a putty knife or a screw driver from the side under the door trim panel and pry off the wire fasteners (2) which fasten the door trim panel to the door inner panel at the two sides (Fig. 72—7/2).
7. Slide the door trim panel over the inside door handle. Then carefully pull out the door trim panel from under the cover plate (1) at the lock or before removing the door

trim panel, press out the cover plate from the lock case.

8. Lift the door trim panel out of the lower retainer.

Installation:

9. For installation reverse the procedure and begin by installing the door trim panel in the lower retainer. Then push the door trim panel under the cover plate (1) at the door lock (Fig. 72—7/2) and press the wire fasteners (2) into the fixing holes.

Note: If the cover plate (1) was removed, first install the door trim panel and then slide on the cover plate.
Rusty wire fasteners should be replaced.

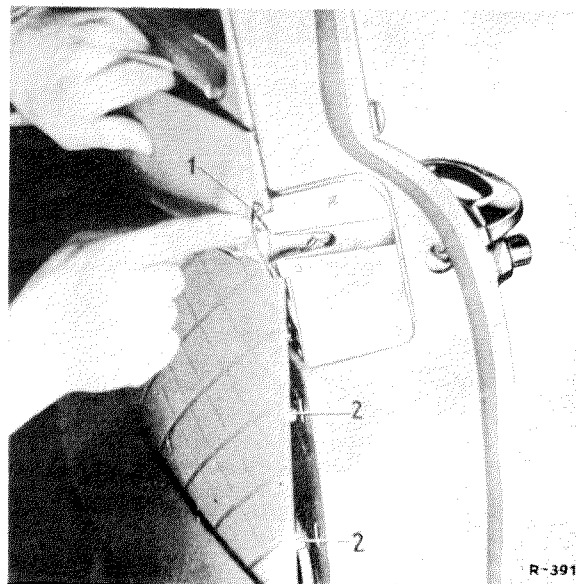


Fig. 72—7/2

1 Cover plate
2 Wire fasteners