

Removal and Installation of Left or Right Drip Molding (Garnish Molding)

Job No.

69 — 4

Removal:

1. Unscrew the butt strap (1) covering the butt of the drip molding (2) so that the two fastening rivets become visible (Fig. 69—4/1).

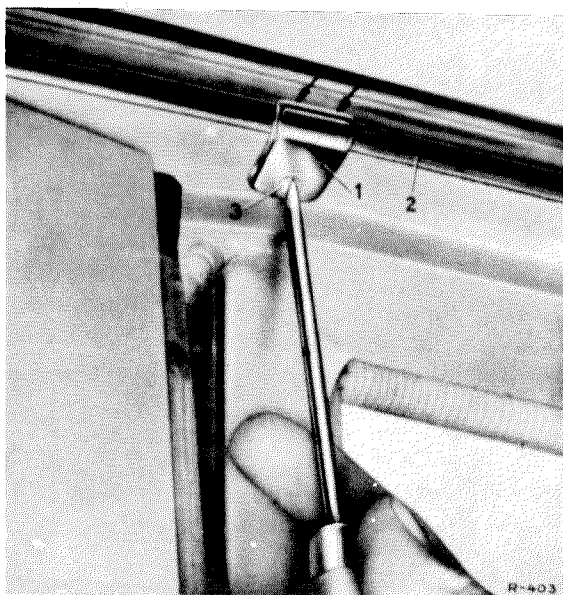


Fig. 69 — 4/1

- 1 Butt strap
- 2 Drip molding
- 3 Countersunk tapping screw

2. Remove the two fastening rivets at the butt and the two fastening rivets at the ends of the drip molding (2). Carefully detach the drip molding and remove. Remove the remains of the sealing cement.

Installation:

During factory installation, the inner web of the drip molding section is pressed in at short intervals by means of special pliers;

when repairs are being carried out, the following procedure is, however, recommended:

3. Apply adhesive linen tape to the drain trough and coat the drip molding with sealing cement.
4. Fit the drip molding and install it in the drain trough by means of a wooden mallet, taking care that the free end of the drip molding does not damage the paintwork.
5. Install the oval head countersunk rivets by means of special Rivet Fastener 180 589 00 37 (Fig. 69 — 4/2). Install the butt strap above the butt.

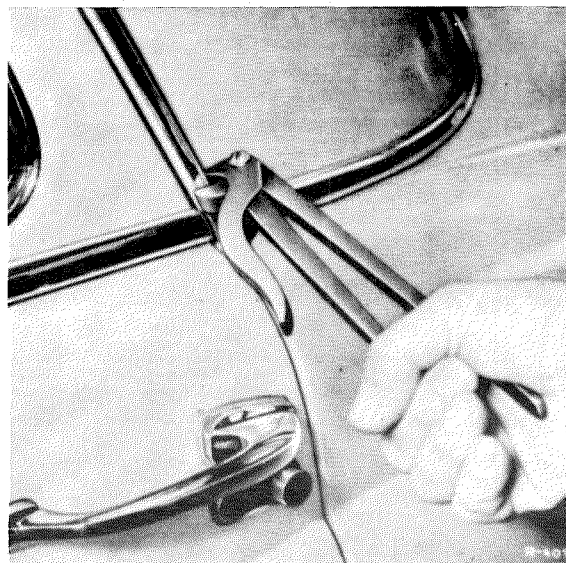


Fig. 69 — 4/2

Note: Rivet Fastener 180 589 00 37 can be used both for tightening the rivets and for the riveting process proper without any danger of damage to the paintwork.