

Removal and Installation of Windshield Reveal Molding

Job No.

67 — 1

The reveal molding consists of the following parts:

Left reveal molding	}	plastic
Right reveal molding		
Upper reveal molding	}	wood
Lower reveal molding		

Removal:

1. Unscrew the rear view mirror.
2. Unscrew the upper reveal molding.
3. Unscrew the left and right reveal moldings.

4. Unscrew the lower reveal molding.

Installation:

5. Installation is the reverse of the removal procedure. Do not omit the sound-absorbing fabric liners.

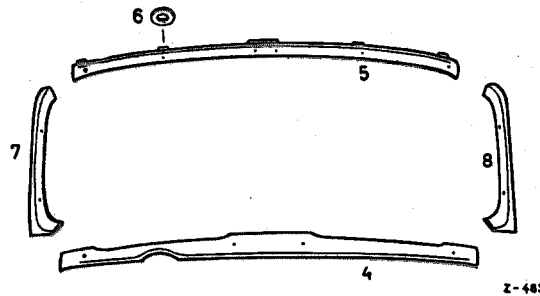


Fig. 67 — 1/1

4 Lower reveal molding
5. Upper reveal molding
6 Rubber or felt washer

7 Left reveal molding
8 Right reveal molding

Removal and Installation of Windshield

Job No.

67 — 2

The windshield consists of the windshield glass, the rubber molding, and the garnish molding.

Removal:

1. Unscrew the rear view mirror. Remove the windshield reveal molding (see Job No. 67 — 1).
2. Use a flat piece of wood to push the rubber lip of the rubber molding from the inside behind the sheet metal edge (Fig. 67 — 2/1) and in this way loosen the entire rubber molding (shown here at back window).

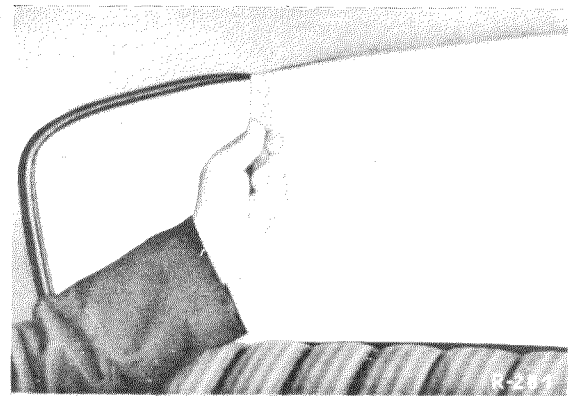


Fig. 67 — 2/1

Shown at back window