

Removal and Installation of the Weatherstrip at the Right or Left Front Door

Removal:

1. Remove the retaining clips at the lower rear corner of the front door (Fig. 72—15/1).

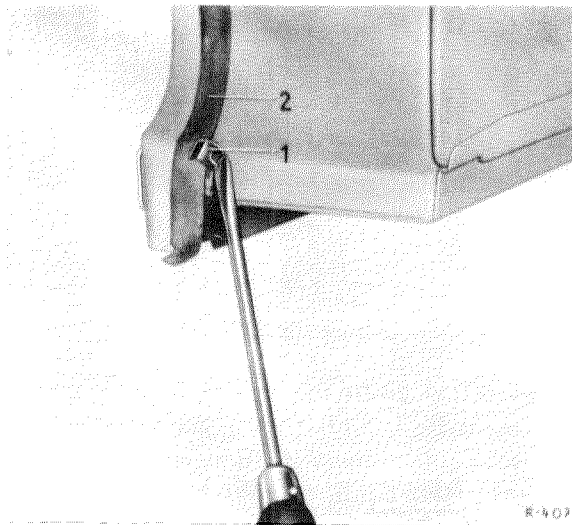


Fig. 72—15/1

1 Retaining clip
2 Weatherstrip

2. Remove the cemented weatherstrip (2) (Fig. 72—15/1). Carefully scrape off all rubber and adhesive residue.

Installation:

3. Coat the groove in the front door with Terokal Rubber Adhesive II. Press the weatherstrip into the groove while it is still wet. Carefully remove any adhesive that may ooze out.

Note: The weatherstrip is applied by means of a so-called two-component adhesive. The weatherstrip supplied as a replacement part has been treated with Terokal Rubber Adhesive I at the cementing surface. The vulcanizing effect which produces a firm bond between rubber and sheet-metal is brought about when the two components come into contact.

4. Install the retaining clip (1) at the lower rear corner.
5. Remove rubber abrasion particles from the door groove by means of gasoline.