

Removal and Installation of Starter Push-Button-Switch

Job No.

54 — 19

Removal:

1. Take the cable covering (cardboard) out of the left glove locker (under the mounting plate for the control knobs).
2. Unscrew the escutcheon from the push-button switch, using Hook Wrench 136 589 02 05.
3. Push the push-button switch forward, pull it

out under the mounting plate and disconnect the electric cables.

Installation:

4. Installation is the reverse of the removal procedure. Connect the two black/red cables (Leads Nos. 24 and 25) (see Job No. 54 — 1, Section A, Circuit Diagram of Main Wiring Harness, Cable Sheaf **12**).

Subsequent Installation of Socket for Inspection Light (in Engine Compartment)

Job No.

54 — 20

(Optional, SA 779/5 - 120)

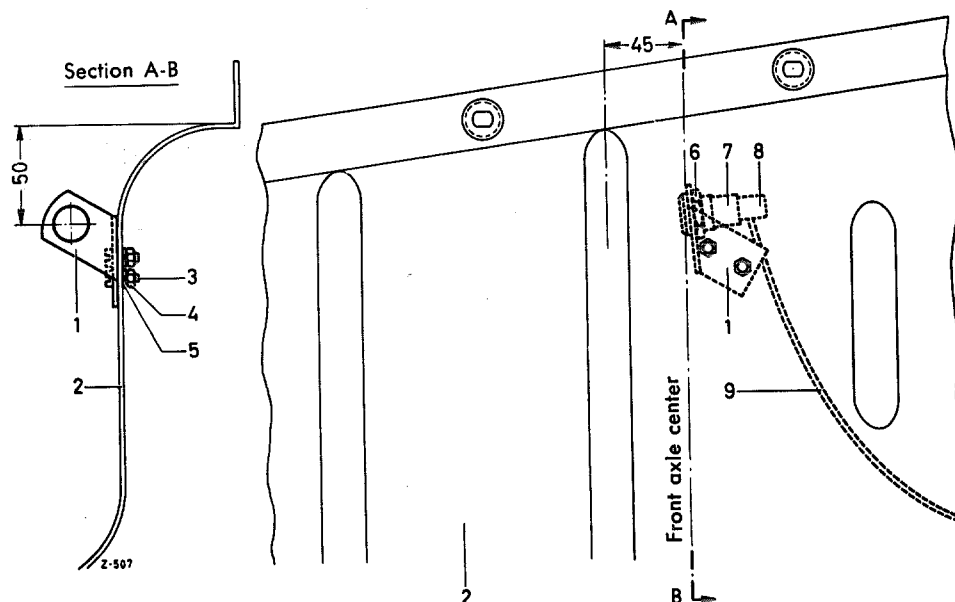


Fig. 54 — 20/1

- | | |
|------------------------|------------------|
| 1 Bracket for socket | 6 Hexagon nut |
| 2 Wheel arch panelling | 7 Socket |
| 3 Cheese-head screw | 8 Plug |
| 4 Hexagon nut | 9 Electric cable |
| 5 Lock washer | |