

Removal and Installation of Left or Right Front Door Window Regulator

Job No.

72—8

Removal:

1. Remove the door trim panel (see Job No. 72—7).
2. Wind the sliding window down to its lowest position.
3. Remove the two sliding window fixing screws (1) at the lower sash channel (2) (Fig. 72—8/1).

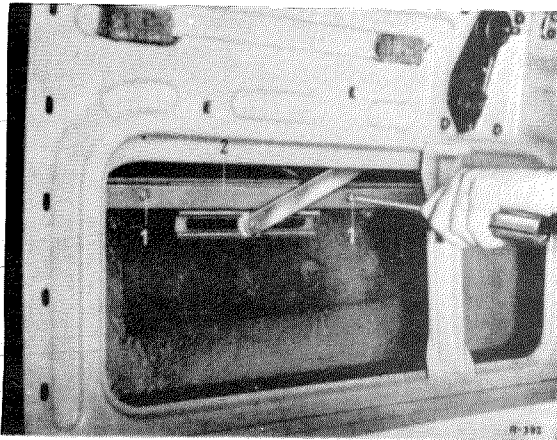


Fig. 72—8/1

1 Fixing screws
2 Lower sash channel

4. Slide the door window glass upward by hand and carefully clamp in position by means of a wooden wedge (Fig. 72—8/2).
5. Remove the two fixing screws (1) for the window glass run channel at the hinge side and push the run channel toward the door outer panel (Fig. 72—8/3).
6. Unscrew the four fixing screws (2) for the window regulator and carefully remove the

window regulator together with lower sash channel downward through the large opening in the door inside panel.



Fig. 72—8/2

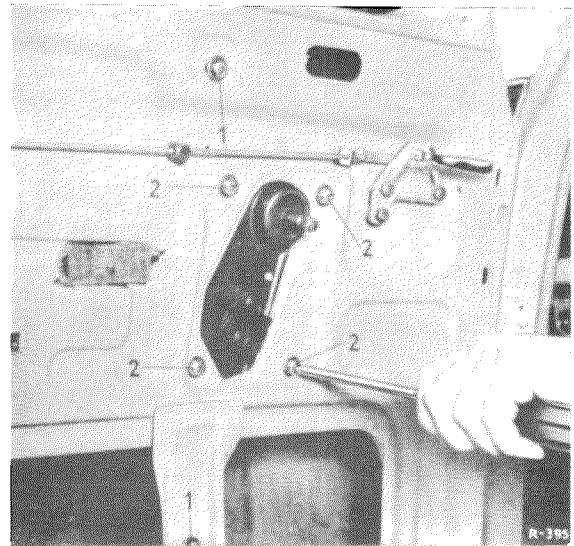


Fig. 72—8/3

1 Window run channel fixing screws
2 Window regulator fixing screws

Installation:

7. Installation is the reverse of the removal procedure.