

Subsequent Installation of Flexible-Mounted Mercedes Star

Job No.

88 — 8

(Optional Extra, SA 55146/3)

1. Remove the standard Mercedes star (Fig. 88 — 8/1).

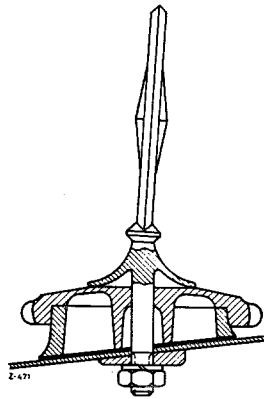


Fig. 88 — 8/1

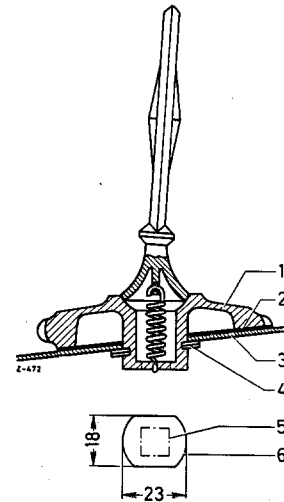


Fig. 88 — 8/2

2. Reshape the existing square hole (5) in the radiator grille in accordance with the hole pattern (6) (Fig. 88 — 8/2).
3. Insert the flexible-mounted Mercedes star (1) with the rubber pad (2) in the new fixing hole (6) in the radiator grille (3).
4. Fix the Mercedes star by installing the locking plate (4) in the groove of the casing.

- 1 Casing
- 2 Rubber pad
- 3 Radiator grille
- 4 Locking plate
- 5 Existing square hole in radiator grille
- 6 Hole pattern

List of Available Parts:

Number	Designation	Part No.
1	Mercedes star	10 180 880 03 86
1	Rubber pad	10 180 888 01 97
1	Locking plate	000 994 01 21
The whole kit can be ordered from our works under Order No. 101808800286.		