

Subsequent Installation of Plexiglass Pane for Screening the Driver's Seat

Job No.
91 — 4

(Optional Extra, KW 5815)

On taxis with a **bench driving seat**, a plexiglass screen can be subsequently installed for the protection of the driver. The screen can only be installed on left-hand drive cars (Fig. 91 — 4/1).

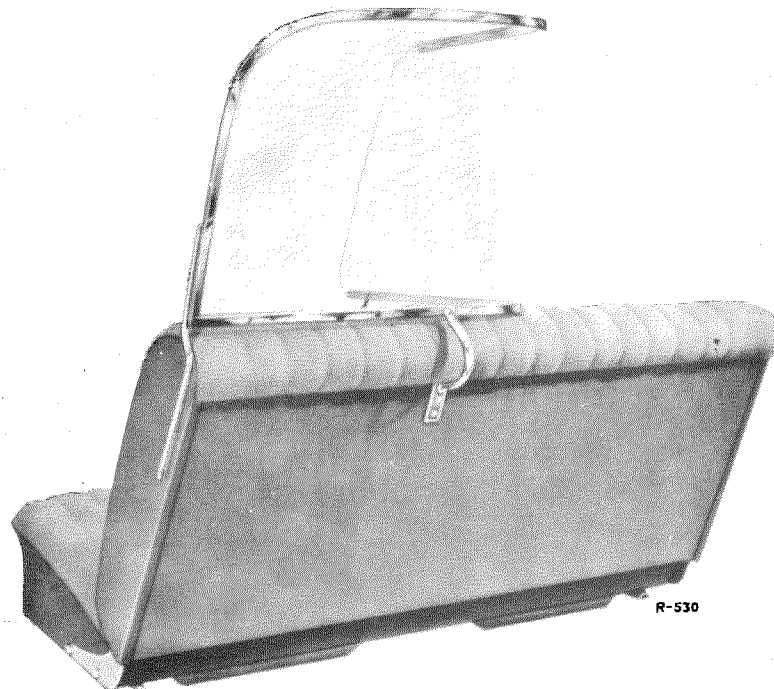
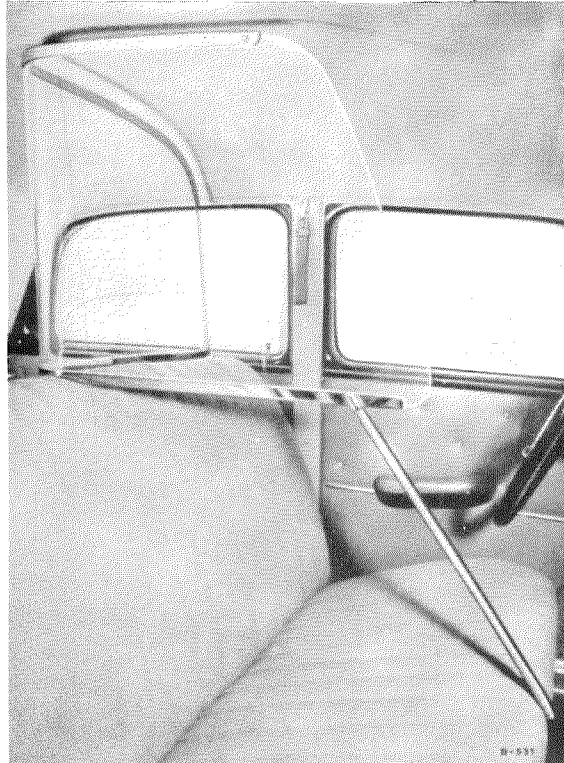


Fig. 91 — 4/1

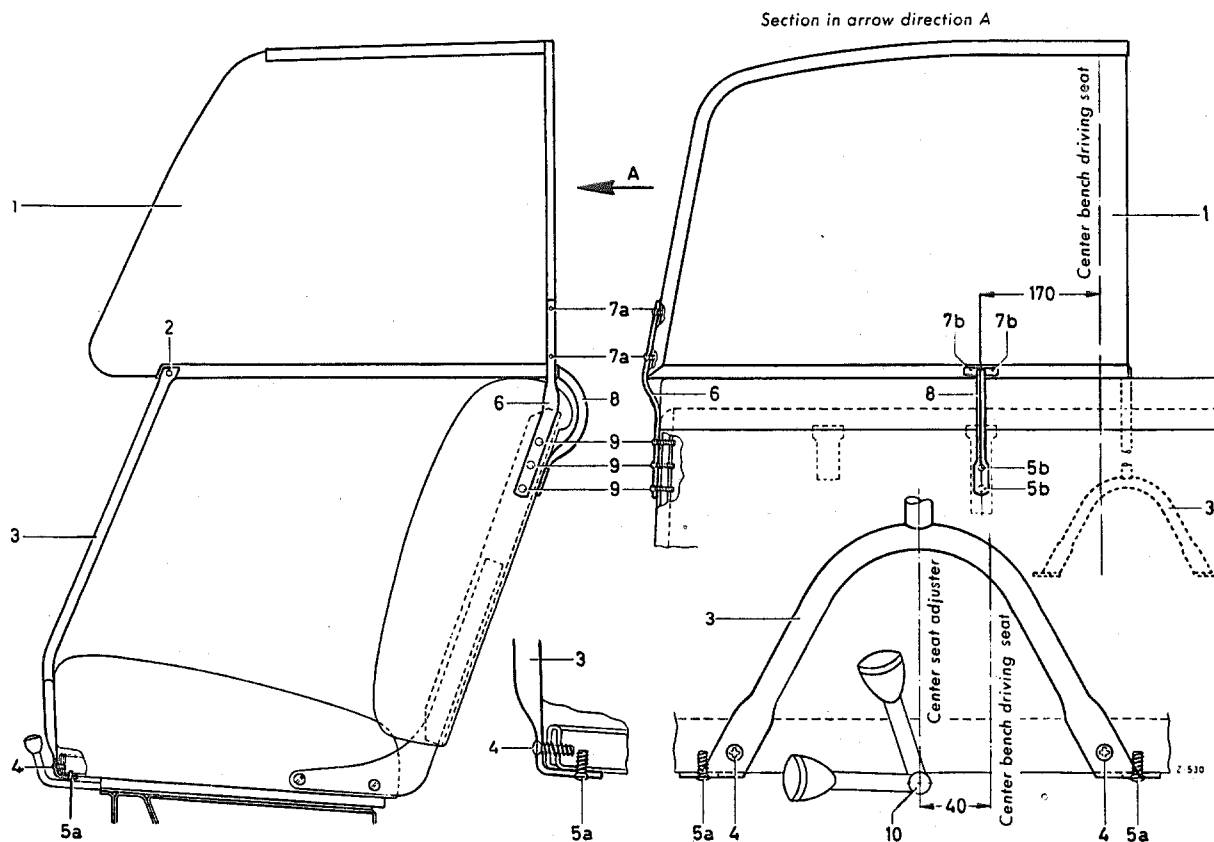


Fig. 91 — 4/2

- 1 Plexiglass pane with frame
- 2 Oval-head countersunk screw AM 5 × 15
- 3 Support tube with bracket for plexiglass pane at seat frame
- 4 Oval-head countersunk tapping screw Z 4.8 × 19
- 5a Oval-head countersunk tapping screw Z 4.8 × 13
- 5b Oval-head countersunk tapping screw Z 4.8 × 13

- 6 Strap for fastening the plexiglass pane to the side of the seat back
- 7a Oval-head countersunk screw AM 4 × 8
- 7b Oval-head countersunk screw AM 4 × 8
- 8 Support for the plexiglass pane at the seat-back
- 9 Oval-head countersunk tapping screw Z 4.8 × 32

1. Remove the bench driving seat (see Job No. 91 — 2).

2. Hold the plexiglass pane (1) with support tube (3), strap (6), and support (8), against the bench driving seat (see Fig. 91 — 4/2), aligning the support tube (3) with the fulcrum of the seat adjuster (10).

Then mark the holes for the fixing screws (4), (5a), and (9) (see Fig. 91 — 4/2), and drill them to a diameter of 3.7 mm.

3. Attach the support tube (3) and the strap (6) to the bench driving seat by screwing in the oval-head countersunk tapping screws (4), (5a), and (9) (see Fig. 91 — 4/2).

4. Align the plexiglass pane (1) again, drill the holes for the oval-head countersunk tap-

ping screws (5b) with a 3.7 mm diameter and screw on the support (8).

Note: Make sure that the holes are drilled into a rib of the seat-back frame.

5. Unscrew the plexiglass pane from the fittings.

6. Reinstall the bench driving seat (see Job No. 91 — 2) and reattach the plexiglass pane.

Note: It is necessary to unscrew the plexiglass pane, since the bench driving seat cannot be reinstalled with the plexiglass pane attached to it.

List of Available Parts:

Number	Designation	Part No.
1	Plexiglass pane with frame	10 120 710 00 22
1	Oval-head countersunk screw	AM 5 × 15 DIN 7988 chromium-plated
1	Support tube with bracket for the plexiglass pane at the seat frame	10 120 710 00 46
2	Oval-head countersunk tapping screw	Z 4.8 × 19 DIN 7983 chromium-plated
4	Oval-head countersunk tapping screw	Z 4.8 × 13 DIN 7983 chromium-plated
1	Strap for fastening the plexiglass pane to the side of the seat back	10 120 711 00 41
4	Oval-head countersunk screw	AM 4 × 8 DIN 7988 chromium-plated
1	Support for the plexiglass pane at the seat back	10 120 710 01 46
3	Oval-head countersunk tapping screw	Z 4.8 × 32 DIN 7983 chromium-plated
The whole kit can be ordered from our works under Order No. 10 120 710 99 22.		