

Removal and Installation of Rubber Molding for Wiper Blade

Job No.

82 — 8

a) Bosch Type

Removal:

1. Remove the wiper blade (see Job No. 82 — 7).
2. Pull the rubber molding (3) out of the retaining spring (4) in the opposite direction to the clamp (5) (Fig. 82 — 8/1).

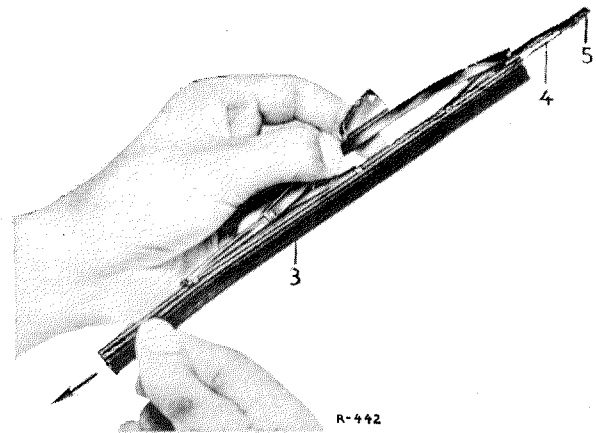


Fig. 82 — 8/1

3 Rubber molding 4 Retaining spring 5 Clamp

Installation:

3. Installation is the reverse of the removal procedure.

b) Avog Type

Removal:

1. Remove the wiper blade (see Job No. 82 — 7).
2. Pull off the clamp (5), depressing the two retaining springs (4) (Fig. 82 — 8/2).
3. Pull the rubber molding (3), together with the retaining springs, out of the anchorage of the wiper blade and take out the retaining springs (see Fig 82 — 8/2).

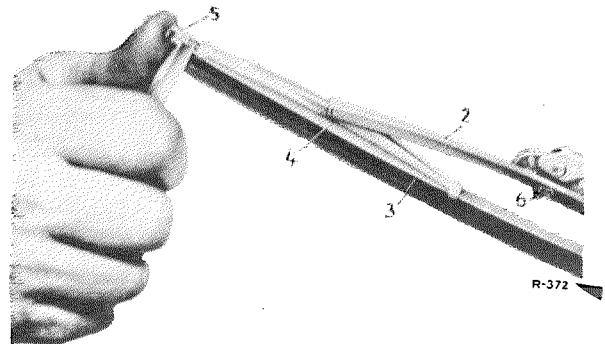


Fig. 82 — 8/2

2 Wiper blade 5 Clamp
3 Rubber molding 6 Lever
4 Retaining springs

Installation:

4. Installation is the reverse of the removal procedure.