

Removal and Installation of Window Regulator Handle at the Left or Right Front or Rear Door

Job No.

72—4

Removal:

1. Carefully press back the escutcheon by means of a screw driver (Fig. 72—4/1).
2. Knock out the cylindrical pin by means of a small drift or a scribe (Fig. 72—4/1).
3. Remove the regulator handle together with the escutcheon spring and spring retainer.

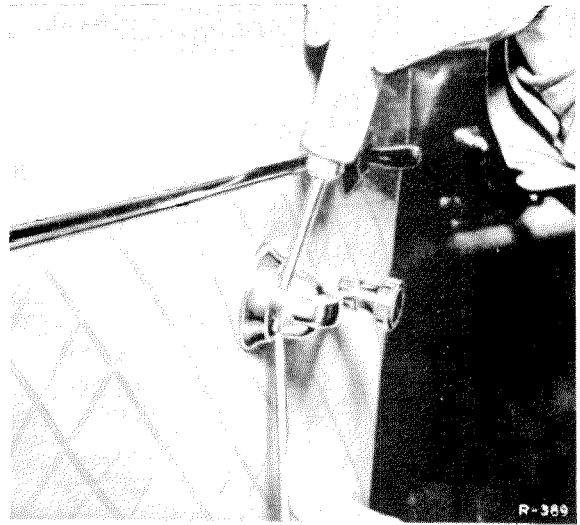


Fig. 72—4/1

Installation:

4. Installation is the reverse of the removal procedure.

Removal and Installation of the Arm Rest at the Left or Right Front or Rear Door

Job No.

72—6

Removal:

1. Unscrew the upper part of the arm rest from the support bracket.
2. Remove the upper part of the arm rest. Then

unscrew the fixing screws for the support bracket and remove the support bracket.

Installation:

4. Installation is the reverse of the removal procedure.